



EUROPEAN SOUTHERN OBSERVATORY

Organisation Européenne pour des Recherches Astronomiques dans l'Hémisphère Austral
Europäische Organisation für astronomische Forschung in der südlichen Hemisphäre

ESO - European Southern Observatory
Karl-Schwarzschild Str. 2, D-85748 Garching bei München

Very Large Telescope Paranal Science Operations AMBER Template Manual

Doc. No. VLT-MAN-ESO-15830-3523

Issue 81, Date 17/12/2007

Prepared F. Rantakyro 17/12/2007
Date Signature

Approved A. Kaufer
Date Signature

Released O. Hainaut
Date Signature

This page was intentionally left blank

Change Record

Issue/Rev.	Date	Section/Parag. affected	Remarks
81		2.3.4 2.2.2	FINITO information Coude info

This page was intentionally left blank

Contents

1	INTRODUCTION	1
1.1	Scope	1
1.2	Contact information	1
1.3	Period of validity of this manual	1
1.4	Acknowledgments	1
1.5	Glossary	1
1.6	Modifications for P81	2
2	AMBER TEMPLATES	4
2.1	Observing modes	4
2.2	The acquisition template	4
2.2.1	Proper motion	5
2.2.2	Coudé guiding with the UTs	5
2.2.3	STRAP guiding with the ATs	6
2.2.4	Source K and H magnitudes	6
2.2.5	Source K and H Visibilities	6
2.3	The observation template	6
2.3.1	Integration time	7
2.3.2	Using IRIS for Lab guiding	7
2.3.3	Selecting the spectral band	7
2.3.4	FINITO	9
2.3.5	AMBER DITs with FINITO	10
2.3.6	Summary Table	10
2.3.7	Using added spectral bands	10
2.3.8	High SNR spectral calibration	12
2.3.9	Execution time	12
2.4	User keywords	12
2.4.1	AMBER_3Tstd_acq.tsf	13
2.4.2	AMBER_3Tstd_obs_1row.tsf	15

1 INTRODUCTION

1.1 Scope

This document describes the **templates** for AMBER, the **A**stronomical **M**ulti-**BE**am **R**ecombiner, of the VLT Interferometer. Like for all the VLT instruments, observations with AMBER are carried out with **observation blocks** (OBs). The OBs must be written by the user during Phase-2 preparation with the P2PP tool. An OB consists of a set of information and several templates that describe the target acquisition and the observation sequence. For some templates, the user has to indicate the values of **keywords** (parameters).

This manual requires the user to already have an insight in the AMBER operation, as described in the “AMBER User Manual”, that can be downloaded from:

<http://www.eso.org/instruments/amber/doc>

For the installation of the P2PP tool, see:

<http://www.eso.org/observing/p2pp>

Note: the AMBER specific templates will be downloaded by the P2PP tool.

For service mode observations, it is important to read the AMBER-specific service mode instructions given on the web page:

<http://www.eso.org/observing/p2pp/AMBER/AMBER-P2PP.html>

This page gives suggestions for OB edition with P2PP (name, constraint set), as well as the requirements for the “readme” file and for the finding charts.

There is also an AMBER P2PP specific web page with a step by step tutorial at:

http://www.eso.org/observing/p2pp/tutorials/tut_amber.html

1.2 Contact information

In case of questions or suggestions related to Phase-2 preparation, please contact the ESO User Support Department (usd-help@eso.org).

1.3 Period of validity of this manual

This manual only applies for observations with AMBER in ESO Period 81, starting April 1st, 2008 and ending September 30th, 2008.

1.4 Acknowledgments

The Editor would like to thank Stan Stefl and Markus Wittkowski for comments and suggestions of improvements to the manual.

1.5 Glossary

- **Constrain Set (CS)**

List of requirements for the conditions of the observation that is given inside an OB. OBs are only executed under this set of minimum conditions.

- **Observation Block (OB)**

An Observation Block is the smallest schedulable entity for the VLT. It consists of a sequence of Templates. Usually, one Observation Block include one target acquisition and up to three exposure templates.

- **Observation Description (OD)**

A sequence of templates used to specify the observing sequences within one or more OBs.

- **Observation Toolkit (OT)**

Tool used to create queues of OBs for later scheduling and possible execution (service mode).

- **Proposal Preparation and Submission (Phase-I)**

The Phase-I begins right after the CfP (Call-for-Proposals) and ends at the deadline for CfP. During this period the potential users are invited to prepare and submit scientific proposals. For more information, see:

<http://www.eso.org/observing/proposals.index.html>

- **Phase-2 Proposal Preparation (P2PP)**

Once proposals have been approved by the ESO Observation Program Committee (OPC), users are notified and the Phase-2 begins. In this phase, users are requested to prepare their accepted proposals in the form of OBs, and to submit them by Internet (in case of service mode). The software tool used to build OBs is called the P2PP tool. It is distributed by ESO and can be installed on the personal computer of the user. See:

<http://www.eso.org/observing/p2pp>.

- **Service Mode (SM)**

In service mode (opposite of the “Visitor-Mode”), the observations are carried out by the ESO Paranal Science-Operation staff (PSO) alone. Observations can be done at any time during the period, depending on the CS given by the user. OBs are put into a queue schedule in OT which later sends OBs to the instrument.

- **Template**

A template is a sequence of operations to be executed by the instrument. The observation software of an instrument dispatches commands written in templates not only to instrument modules that control its motors and the detector, but also to the telescopes and VLTI sub-systems.

- **Template signature file (TSF)**

File which contains template input parameters.

- **Visitor Mode (VM)**

The classic observation mode. The user is on-site to supervise his/her program execution.

1.6 Modifications for P81

Due to changes of the optical setup of AMBER/IRIS/ARAL/FINITO now IRIS is always used, taking 30% of the K band flux. The H band is sent undiminished to AMBER.

It is now mandatory to give the source uncorrelated K and H band magnitudes, and, the **minimum** K and H visibilities of the target for the requested LST range. It is **critical** that these numbers are as accurate as possible as configuration of IRIS and FINITO is based on these values. In particular, too optimistic values are critical as they will strongly degrade the FINITO performance.

Note that if FINITO is used then it will use 70% of the H-band flux.

2 AMBER TEMPLATES

2.1 Observing modes

As indicated in the “AMBER web pages” found at:

<http://www.eso.org/instruments/amber/inst/index.html>

the following setup of AMBER will be offered for P81:

- 17 spectral modes available:
 1. Low Resolution JHK using IRIS, where 30% of K is always sent to IRIS.
 2. Medium Resolution K-band, center wavelength $2.1\mu\text{m}$.
 3. Medium Resolution K-band, center wavelength $2.3\mu\text{m}$.
 4. High Resolution K-band, with 14 central wavelengths.
- Table 2.3.6 gives a summary of the possible DITs that can be used depending on telescopes, FINITO, and/or differential mode. The user can also check the latest on line information at:
<http://www.eso.org/instruments/amber/overview.html>
 as this information supersedes any numbers presented in this manual.
- The limited DITs on the UTs and on the ATs without FINITO limits the $\Delta\lambda$ to $0.04\mu\text{m}$ in MRK and $0.008\mu\text{m}$ in HRK for DIT=0.025s. Each added 25 ms to the DIT increases the window by $0.04\mu\text{m}$. E.g. with DIT=0.1 s one would have $\Delta\lambda$ to $0.16\mu\text{m}$ in MRK and $0.032\mu\text{m}$ in HRK.
- Coudé guiding on the science target or a guide star. It should be noted that without MACAO the flux will be severely time dependent and will not reach the magnitude limits given in this document or in the CfP. For proper AMBER observations Coudé guiding must be used. For proper MACAO operation the SCIENCE target or the guide star must be suitable for guiding (see section 2.2.2. Similar constraints for the STRAP are given in section 2.2.3.
- Only baselines with three UTs or three ATs (3T template).
- Only one read-out mode (1 row) on the detector.
- External fringe tracker (FINITO) is available only on the ATs. See section 2.3.4 for the constraints that must be fulfilled for FINITO fringe tracking.

Hence, the number of templates for P81 is minimal: one template for the preset, acquisition and fringe search, and one template for fringe observation. Moreover, because of the policy adopted by ESO for observations with AMBER in service mode (one calibrated visibility point every 90 minutes), the number of keywords to be set by the user is very limited.

2.2 The acquisition template

According to P2PP rules, the first template in an OB must be an acquisition template. In the case of AMBER, the name of this template is: *AMBER_3Tstd_acq*.

The sequence of this template starts by a “preset”: the target coordinates (α, δ) are sent to the telescopes and the delay lines, so they can slew to the position corresponding to the target coordinate at preset time. Once the telescopes are tracking and Coudé-guiding, the target should be seen on the *Image Alignment Sensor*, currently IRIS. To ensure that the beams are injected properly to AMBER the *Image Alignment Sensor* is used to align the object to the VLTI reference points (“image optimization”). To ensure that maximum flux is injected an “injection adjustment” is done. This is done by sending offsets to the telescopes to maximize the flux injected into the AMBER fibers.

2.2.1 Proper motion

In particular in Low resolution mode it is critical to have the information on the observed proper motion of the object as a proper motion larger than 50 mas/year can slow down or impede the fringe search. For an effective use of the allocated time we strongly suggest that the user puts the measured proper motion into the P2PP.

2.2.2 Coudé guiding with the UTs

It is possible to have an object different from the science target as a guide star at the Coudé focus. The requirements are:

- The guide star must be brighter than $V = 17$ (MACAO is used for Coudé guiding). Note that the Strehl drops significantly in K with a Coudé guide star fainter than the 13-14th magnitude and that by magnitude 16th the magnitude limits for the science object drops by more than 1 magnitude.
- The guide star must be within a radius of 57.5 arcsec from the science target. Note that the Strehl drops with distance from the science target, so it is recommended that the user chooses a Coudé guide star as close as possible. If at distances larger than a few tenths of arcseconds from the science target more than 1 magnitude can be lost.
- The guide star must be fainter than $V = 1$.
- It is requested that the faintest (if variable) V magnitude of the Coudé guide star is given in the keyword `TEL.CO.U.MAG`.
- There are a few additional weather condition constraints for proper MACAO performance, which are also important even though the SCIENCE object is used for the Coudé guiding:
 - Seeing should be better than 1.5 arc sec.
 - $\tau_{0} > 1.5$ ms
 - Airmass < 2 .

These constraints do not affect Service observations as OBs are only classified as A or B if MACAO has been performing within the tolerances. The constraints are given here for Visitor mode observations to give the user the conditions under which MACAO will perform as expected. Thus during non ideal weather conditions outside the MACAO performance ranges the user could ameliorate the effects to some degree by only using brights guide stars and only observing at the high elevation.

Note: The magnitude limits are identical for Coudé guiding on the **SCIENCE** target, and are different from the limiting magnitudes for the AMBER instrument. **Note:** A plot of the expected Strehl as function of guide star magnitude, distance and weather conditions is shown in figure 1

Note: To inject light into AMBER a Coudé guide star must be used. It is not possible under any weather conditions to perform AMBER observations not using MACAO on the UTs.

2.2.3 STRAP guiding with the ATs

Note: To inject light into AMBER a guide star must be used with STRAP. It is not possible under any weather conditions to perform AMBER observations not using STRAP on the ATs. The requirements for successful STRAP guiding are:

- The guide star must be brighter than $V = 13$. Note that the tip tilt correction drops significantly in K with a STRAP guide star fainter than the 11th magnitude and that by magnitude 13th the magnitude limits for the science object drops by more than 1 magnitude.
- The guide star must be fainter than $V = -1.7$.
- The guide star must be within a radius of <60 arcseconds from the science target. Note that the effective tip tilt correction drops with distance from the science target, so it is recommended that the user chooses a guide star as close as possible.
- It is requested that the faintest (if variable) V magnitude of the guide star is given in the keyword `TEL.CO.U.MAG`. This is true for all cases when STRAP is used.

2.2.4 Source K and H magnitudes

The `SEQ.SOURCE.HMAG` and `SEQ.SOURCE.KMAG` keywords should be used to specify the uncorrelated H and K band fluxes of the science target.

2.2.5 Source K and H Visibilities

The `SEQ.SOURCE.HVIS` and `SEQ.SOURCE.KVIS` keywords should be used to specify the **minimum** visibility on the two shortest baselines for the science target in the requested LST range. It is critical that these numbers are correct as possible since they are used to configure FINITO and in particular too optimistic numbers can impede proper FINITO operation. It is safer to underestimate the Visibility as the FINITO operation can adapt to higher Visibilities than expected (although with possible reduced performance).

The final step in the Acquisition template is to search for fringes (“fringe search”). If FINITO is used then the fringe search will be performed by FINITO and if not selected then it is done by AMBER by doing a saw tooth search around the nominal fringe position. Note that there are no user keywords available for this step.

2.3 The observation template

This template is the second and the last one (although see section 2.3.7 and section 2.3.8) in any AMBER OB description for P81. It is used to record the photometric beams and the

dispersed fringes. There is currently only one template:

1. 3T exposures using 1 readout row on the detector, *AMBER_3Tstd_obs_1row*.

Each exposure consists of one dispersed photometric spectrum for each telescope and one dispersed fringe spectrum. The standard observation template takes 7 exposures, one dark (DARK), five on source exposures (OBJECT), and, one off-source exposure (SKY).

The `TEL.OFFS.ALPHA` and `TEL.OFFS.DELTA` are used to select the location of the off target exposure. These offsets will move the telescopes in the directions given.

2.3.1 Integration time

If the object is too faint/resolved/high Airmass for FINITO operation or using the UTs (where currently FINITO isn't available) the integration times with AMBER will have to be short to minimize atmospheric turbulence. It is foreseen to use a DIT of 0.025 s (0.05 and 0.1 s available on the ATs) for all observations. The exception to this rule is the use of differential phase observations and High Resolution K observations. In these cases it is possible to use a DIT twice the standard DIT, *i.e.* 0.05 s on the UTs and 0.1 s on the ATs. **Note:** The DIT of the Science and Calibrator targets **must** be identical to avoid biasing the data.

Note II: As a consequence the magnitude of the Calibrator is strongly suggested to be within ± 0.5 -1 (uncorrelated) magnitude of the science target.

Both the issues above are to avoid the biasing that is caused by having different detector read-out levels on the Science and Calibrator.

2.3.2 Using IRIS for Lab guiding

IRIS is always used for lab guiding. This ensures that the slow tunnel tip/tilt effects are corrected. The H flux is sent undiminished to AMBER while 30% of the K band flux is used for the IRIS guiding. This magnitude loss is included in the given magnitude limits.

2.3.3 Selecting the spectral band

There are 17 available spectral configurations available for AMBER. The low resolution (LR) covers the full spectral band of the instrument with $R \sim 35$, while the medium resolution grating (MR, with $R \sim 1500$) can currently be configured for two wavelength ranges in the K-band and the high resolution grating (HR, with $R \sim 12000$) can currently be configured for 14 wavelength ranges. The user should select the proper spectrograph configuration depending on the desired observing wavelength (see table 2.3.3). The final constraint in the spectral configuration is the upper and lower limits of the spectral range. Currently due to the fixed DIT of 0.025 s (or 0.05 s for differential phase observations, see "AMBER User Manual" for a description of this mode) the total spectral range is $0.04 \mu\text{m}$ in MRK and $0.008 \mu\text{m}$ in HR and twice that for DIT=50 ms). These are set by using the keywords:

`OCS.DET.ROW0.WLENMAX` and `OCS.DET.ROW0.WLENMIN` in the *AMBER_3Tstd_obs_1row.tsf* template.

An example of the proper settings of the keywords for a template observing with *Medium_K_1-2.1*, centered around $\lambda 2.16 \mu\text{m}$ would be:

- `DET1.DIT = 0.025`

Table 1: Allowed spectral configurations and spectral ranges. The maximum $\Delta\lambda$, should be used to determine the WLENMIN/MAX for the observing template. The numbers are all given for DIT=0.025s and should be scaled accordingly if DIT is increased *i.e* DIT=0.05s allows twice the $\Delta\lambda$ so that in MR it would be 0.08 μm .

Spectral Configuration	Covered wavelength range [μm]	Maximum $\Delta\lambda$ [μm]
Low_JHK	1.027–2.54 μm	<i>Full range</i>
Medium_K_1_2.1	1.926–2.275 μm	0.04 μm
Medium_K_1_2.3	2.126–2.474 μm	0.04 μm
High_K_1_1.979	1.955–2.003 μm	0.008 μm
High_K_1_2.018	1.994–2.042 μm	0.008 μm
High_K_1_2.056	2.032–2.079 μm	0.008 μm
High_K_1_2.095	2.071–2.118 μm	0.008 μm
High_K_1_2.133	2.110–2.156 μm	0.008 μm
High_K_1_2.172	2.149–2.195 μm	0.008 μm
High_K_1_2.211	2.187–2.235 μm	0.008 μm
High_K_1_2.249	2.226–2.272 μm	0.008 μm
High_K_1_2.288	2.265–2.311 μm	0.008 μm
High_K_1_2.326	2.303–2.348 μm	0.008 μm
High_K_1_2.365	2.342–2.387 μm	0.008 μm
High_K_1_2.403	2.381–2.425 μm	0.008 μm
High_K_1_2.442	2.420–2.464 μm	0.008 μm
High_K_1_2.481	2.459–2.503 μm	0.008 μm

- $OCS.DET.ROW0.WLENMAX = 2.18$
- $OCS.DET.ROW0.WLENMIN = 2.14$

Note: Using FINITO in MR or HR the full spectral range can be used in all cases.

2.3.4 FINITO

FINITO is offered on the Auxiliary Telescopes (ATs). FINITO scans the center of the fringe packet in H band with high speed and sends a co-phasing signal to the VLTI Delay Lines via a dedicated high speed link. Due to the short individual exposure times (between 0.5ms and 2ms) and the need to measure the fringe in every individual scan, the sensitivity of FINITO is somewhat worse than for AMBER in Low Resolution mode that slowly records the fringe and can reject some data. FINITO operates on two channels, i.e. tracks three baselines. Note that if FINITO is used then it will use either 70% or 100% of the H-band flux. This will only affect the LR-JHK mode as in MR-K or HR-K the 100% dichroic is used and for LR-JHK the 70% one is used, thus loosing 1.3 magnitudes in the H-band.

The full potential of FINITO comes with AMBER using higher spectral resolution *i.e* Medium and High Resolution. Since the fringes are "frozen" in OPD space, AMBER can integrate longer and/or one can stack the individual fringes during post processing.

Currently, FINITO operations are feasible under the following conditions:

- Seeing below 1.2 arcseconds
- τ_0 above 2.5ms
- Airmass less than 1.5.
- The limiting correlated magnitude for FINITO is $H = 3$
- The minimum visibility in the H band is 15%.

These numbers were determined with a seeing less than 1.2 arcseconds and τ_0 above 2.5ms.

Under weather conditions better than the nominal ones given above it is possible to go fainter with both AMBER and FINITO.

- With optimal weather conditions ie Seeing $\leq 0.6''$ and Coherence time ≥ 3 ms, it is possible to reach $K=5$ and $H=5$ in all modes ie for LR-KH, MR-K and HR-K.
- With seeing between $0.6''$ and $0.8''$ the limit is $K=4$ and $H=4$.
- With the nominal weather conditions (Seeing between $0.8''$ and $1.2''$) the limit is as stated above $K=3$ and $H=3$.

The usage of FINITO is set by the `TEL.DEL.FTSENSOR` keyword in the ACQ template. To use it the keyword value should be changed from the default `NONE` to `FINITO`.

Using FINITO thus allows AMBER to:

- Read-out the full spectral range in Medium and High Resolution: The user should thus specify the full spectral range using:

Table 2: AMBER DITs as function of AMBER K magnitude. Note that the DIT for the calibrator **must** be the same as for the science object. Thus to avoid systematic errors a calibrator should ideally be within 0.5 magnitudes of the science object. Note that for better than normal weather conditions K magnitudes 4 and 5 can be reached. The DITs to be used in these cases are then the same as the DIT for a K=3 object.

Spectral Mode	K magnitude (uncorrelated)	DIT [s]
Low Resolution (any dichroic)	$K_{\text{mag}} \leq 3$	0.05
Medium Resolution K (H100% dichroic)	$K_{\text{mag}} \leq 1$	0.20
Medium Resolution K (H100% dichroic)	$1 < K_{\text{mag}} \leq 2$	0.50
Medium Resolution K (H100% dichroic)	$2 < K_{\text{mag}} \leq 3$	1.0
High Resolution K (H100% dichroic)	$K_{\text{mag}} \leq 0$	1.0
High Resolution K (H100% dichroic)	$0 < K_{\text{mag}} \leq 1$	3.0
High Resolution K (H100% dichroic)	$1 < K_{\text{mag}} \leq 2$	6.0
High Resolution K (H100% dichroic)	$2 < K_{\text{mag}} \leq 3$	12.0

– OCS.DET.ROWO.WLENMAX = 9999

– OCS.DET.ROWO.WLENMIN = 0

- Use longer than normal DITs (up to 12s). Note though that the DIT **must** be the same on the Calibrator as on the Science object.
- Allow a limiting correlated magnitude of up to K=5 in either Medium or High Resolution.
- Stabilize the fringes in the low resolution, so that higher quality data can be recorded.

2.3.5 AMBER DITs with FINITO

With the use of FINITO on the ATs longer than normal DITs are feasible. The DIT of AMBER depends on the K magnitude of the object and is given in table 2.3.5

2.3.6 Summary Table

Table 2.3.6 summarizes the current AMBER/AMBER+FINITO limits and possible configurations assuming nominal weather conditions.

2.3.7 Using added spectral bands

It is possible to obtain visibility measurements at several spectral positions inside the range allowed by each configuration, *ie*, to obtain calibrated visibilities on a line and the surrounding continuum. In this case the user adds one *AMBER_3Tstd_obs_1row* template after the last observation template.

Note: This is **only** possible if the same spectral configuration is kept, and is limited to two additional observation templates, *ie*, a total of three observing templates in the same OB. It should also be stressed that the same observing configuration should be used for the calibrator.

Table 3: Summary of available spectral configurations (Mode), telescopes (Tel), limiting K and H correlated magnitudes (K_c and H_c), limiting K and H visibilities (K_{Vis} and H_{Vis}), limiting Airmass (AM), DITs and maximum $\Delta\lambda$.

Mode	Tel	FINITO	K_c	H_c	K_{Vis}	H_{Vis}	AM	$\Delta\lambda$ [μm]	DIT [s]
LR	UT	no	$K_c \leq 7$	$H_c \leq 7$	≥ 0.1	≥ 0.1	≤ 2.0	Full	0.025, 0.05
MRK	UT	no	$K_c \leq 4$	NA	≥ 0.1	≥ 0.1	≤ 2.0	0.04	0.025
MRK	UT	no	$K_c \leq 4$	NA	≥ 0.1	≥ 0.1	≤ 2.0	0.08	0.05
HRK	UT	no	$K_c \leq 1.5$	NA	≥ 0.1	NA	≤ 2.0	0.016	0.05
HRK	UT	no	$K_c \leq 1.5$	NA	≥ 0.1	NA	≤ 2.0	0.032	0.1
LR	AT	no	$K_c \leq 3.6$	$H_c \leq 4.0$	≥ 0.05	≥ 0.05	≤ 2.0	Full	0.025
LR	AT	no	$3.6 < K_c \leq 4.4$	$4.0 < H_c \leq 4.8$	≥ 0.05	≥ 0.05	≤ 2.0	Full	0.05
LR	AT	no	$4.4 < K_c \leq 5.1$	$4.8 < H_c \leq 5.5$	≥ 0.05	≥ 0.05	≤ 2.0	Full	0.1
MRK	AT	no	$K_c \leq 0.6$	NA	≥ 0.05	≥ 0.05	≤ 2.0	0.04	0.025
MRK	AT	no	$0.6 < K_c \leq 1.1$	NA	≥ 0.05	≥ 0.05	≤ 2.0	0.08	0.05
MRK	AT	no	$1.1 < K_c \leq 1.6$	NA	≥ 0.05	≥ 0.05	≤ 2.0	0.16	0.1
LR	AT	yes	$K_c \leq 3$	$H_c \leq 3$	≥ 0.05	≥ 0.15	≤ 1.5	Full	0.05
MRK	AT	yes	$K_c \leq 1$	$H_c \leq 3$	≥ 0.05	≥ 0.15	≤ 1.5	Full	0.2
MRK	AT	yes	$1 < K_c \leq 2$	$H_c \leq 3$	≥ 0.05	≥ 0.15	≤ 1.5	Full	0.5
MRK	AT	yes	$2 < K_c \leq 3$	$H_c \leq 3$	≥ 0.05	≥ 0.15	≤ 1.5	Full	1.0
HRK	AT	yes	$K_c \leq 0$	$H_c \leq 3$	≥ 0.05	≥ 0.15	≤ 1.5	Full	1.0
HRK	AT	yes	$0 < K_c \leq 1$	$H_c \leq 3$	≥ 0.05	≥ 0.15	≤ 1.5	Full	3.0
HRK	AT	yes	$1 < K_c \leq 2$	$H_c \leq 3$	≥ 0.05	≥ 0.15	≤ 1.5	Full	6.0
HRK	AT	yes	$2 < K_c \leq 3$	$H_c \leq 3$	≥ 0.05	≥ 0.15	≤ 1.5	Full	12.0

2.3.8 High SNR spectral calibration

In the two MRK modes an added high SNR observation will be performed at the end of the final observing template. Its purpose is to allow later correction of the spectra by the user in the offline data reduction. This observation covers the full MRK band in question and is delivered automatically and requires no user input.

2.3.9 Execution time

The execution time for one uncalibrated visibility is fixed to 45 minutes. Users interested in obtaining visibility measurements at several spectral positions inside the range allowed by each configuration should add 15 minutes for each additional spectral band. Each band will be defined by its minimum and maximum wavelength, with a span of $0.04\mu\text{m}$ in MR and $0.008\mu\text{m}$ in HR. A maximum of 3 bands can be accommodated within one observation *ie* at total execution time of 150 minutes for both **SCIENCE** and **CALIBRATOR**. Each change of configuration, or a number of bands exceeding 3, will require a new acquisition, *ie*, 45 minutes per uncalibrated visibility.

The execution time can be detailed at template level, where the *AMBER_3Tstd_acq_1row* takes 30 minutes, and the *AMBER_3Tstd_obs_1row* takes 15 minutes. Thus the total execution time for an OB with one acquisition template and one observing template takes 45 minutes.

Note: The calibrator has to be observed with the same configuration and thus the total execution time for one calibrated visibility spectrum is 90 minutes for one calibrated visibility. If for example the user has two spectral bands the total time for one SCIENCE OB and one CALIB OB is 120 minutes.

2.4 User keywords

In the following tables, we give for each template the keywords that have to be set by the user with the P2PP tool.

2.4.1 AMBER_3Tstd_acq.tsf

Parameter	Range (<i>Default</i>)	Label
SEQ.SOURCE.HMAG	-5...30 (<i>0</i>)	Source uncorrelated H magnitude
SEQ.SOURCE.HVIS	0...1 (<i>0.7</i>)	Source minimum H Visibility for the requested LST range
SEQ.SOURCE.KMAG	-5...30 (<i>0</i>)	Source uncorrelated K magnitude
SEQ.SOURCE.KVIS	0...1 (<i>0.7</i>)	Source minimum K Visibility for the requested LST range
TEL.DEL.FTSENSOR	NONE FINITO (<i>NONE</i>)	Using FINITO as external fringe tracker or not.
TEL.TARG.ADDVELALPHA	-15...15 (<i>0</i>)	Differential RA tracking in arc-sec/sec.
TEL.TARG.ADDVELDELTA	-15...15 (<i>0</i>)	Differential DEC tracking in arc-sec/sec.
TEL.COU.ALPHA	RA (<i>0.</i>)	RA of a guide star.
TEL.COU.DELTA	DEC (<i>0.</i>)	DEC of a guide star.
TEL.COU.GSSOURCE	SETUPFILE SCIENCE (<i>SCIENCE</i>)	Coudé guide star, this can be either the science object (SCIENCE), a guide star (SETUPFILE), or no Coudé guiding (NONE). See section 2.2.2.
TEL.COU.MAG	0...25 (<i>12.</i>)	Guide star magnitude in V. This must be supplied and in the case of a variable star the maximum magnitude should be given.
DPR.CATG	SCIENCE CALIB (<i>SCIENCE</i>)	Science or calibrator OB.
OCS.OBS.SPECCONF	Low_JHK Medium_K_1.2.1 Medium_K_1.2.3 (<i>NODE-FAULT</i>)	Spectral configuration

Below follows a more detailed description of the keywords in the acquisition template:

- SEQ.SOURCE.HMAG and SEQ.SOURCE.KMAG are the uncorrelated H and K band magnitudes of the target, the light of which is sent to the AMBER fibers.
- SEQ.SOURCE.HVIS and SEQ.SOURCE.KVIS keywords should be used to specify the **minimum** visibility on the two shortest baselines for the science target in the requested LST range. It is critical that these numbers are correct as possible since they are used to configure FINITO and in particular too optimistic numbers can impeded proper FINITO operation. It is safer to be underestimating the Visibility as the FINITO operation can adapt to higher Visibilities than expected (although with possible reduced performance).
- TEL.DEL.FTSENSOR: By changing this from the default NONE to FINITO the user will use FINITO as an external fringe tracker allowing stabilized fringes and thus longer DITs.
- TEL.TARG.ADDVELALPHA/DELTA: These keywords should be used for object moving on the sky with a large differential motion, as e.g. asteroids or comets. For the objects with normal proper motion (a few arcseconds/year) should fill in the field **proper motion** RA/DEC (units are in arcsec/year) in the bottom right of the P2PP window.

- `TEL.CO.U.ALPHA/DELTA`: Coordinates of the Coudé guide star. These keywords should only be specified if the keyword `TEL.CO.U.GSSOURCE` is set to `SETUPFILE`. Otherwise they should be 0.0 as the Coudé Guiding will use the science target to guide on.
- `TEL.CO.U.GSSOURCE`: This keyword is used to tell the system if Coudé guiding or STRAP guiding is to be used. Note that without Coudé/STRAP guiding and thus without MACAO/STRAP AMBER cannot be operated. The keyword can have the following values :
 - `NONE`: No Coudé guiding and thus NO MACAO (AMBER requires a working MACAO to perform within specifications).
 - `SCIENCE`: Coudé guiding on the science object. The coordinates are those given in the RA/DEC fields in P2PP.
 - `SETUPFILE`: Coudé guiding on a guide star. The coordinates are those given in the `TEL.CO.U.ALPHA/DELTA` fields in P2PP. Please note the constraints for MACAO guide star in section 2.2.2 and that these constraints are also pertinent if Coudé guiding are attempted on the `SCIENCE` object.
- `TEL.CO.U.MAG`: Coudé guide star Visual magnitude. This should **always** be specified. In the case of a variable star the maximum magnitude should be given.
- `DPR.CATG`: This keyword is used to specify whether this is a Science OB (`SCIENCE`) or Calibrator OB (`CALIB`). This should conform with the labeling of the OB (see AMBER Specific P2PP info on the ESO P2PP pages).
- `OCS.OBS.SPECCONF`: This keyword sets the desired spectral configuration. It can be:
 - `Low_JHK`: Low resolution observations covering bands J, H, and K.
 - `Medium_K_1_2.1`: Medium resolution observations in K with the central wavelength 2.1 μm .
 - `Medium_K_1_2.3`: Medium resolution observations in K with the central wavelength 2.3 μm .
 - `High_K_1_X.XXX`: High resolution observations in K with the central wavelength taken from the table 2.3.3.

2.4.2 AMBER_3Tstd_obs_1row.tsf

Parameter	Range (<i>Default</i>)	Label
SEQ.SOURCE.HMAG	-5...30 (<i>0</i>)	Source uncorrelated H magnitude
SEQ.SOURCE.HVIS	0...1 (<i>0.7</i>)	Source minimum H Visibility for the requested LST range
SEQ.SOURCE.KVIS	0...1 (<i>0.7</i>)	Source minimum K Visibility for the requested LST range
SEQ.SOURCE.KMAG	-5...30 (<i>0</i>)	Source uncorrelated K magnitude
DET1.DIT	0.025 0.050 (<i>0.025</i>)	Frame integration time (DIT in s)
TEL.OFFS.ALPHA	-999...999 (<i>0</i>)	Telescope sky offset in RA (arc-sec).
TEL.OFFS.DELTA	-999...999 (<i>30</i>)	Telescope sky offset in DEC (arc-sec).
OCS.DET.ROWO.WLENMAX	0.0...9999.0 (<i>NODEFAULT</i>)	Row 1:max wavelength (in μm).
OCS.DET.ROWO.WLENMIN	0.0...9999.0 (<i>NODEFAULT</i>)	Row 1:min wavelength (in μm).

A detailed explanation of the keywords in the observing template follows:

- DET1.DIT: Frame integration time in seconds.
- TEL.OFFS.ALPHA/DELTA: Telescope sky offset in RA/DEC (arcsec), these offsets are used for taking the sky exposure. These offsets will move the telescopes in the given directions.
- OCS.DET.ROWO.WLENMAX: Upper limit of the desired wavelength range in μm . For ranges see section 2.3.3. If the number 9999 is used then the upper limit will be set to the maximum value for the desired spectral configuration.
- OCS.DET.ROWO.WLENMIN: Lower limit of the desired wavelength range in μm . For ranges see section 2.3.3. If the number 0 is used then the lower limit will be set to the minimum value for the desired spectral configuration.

---oOo---

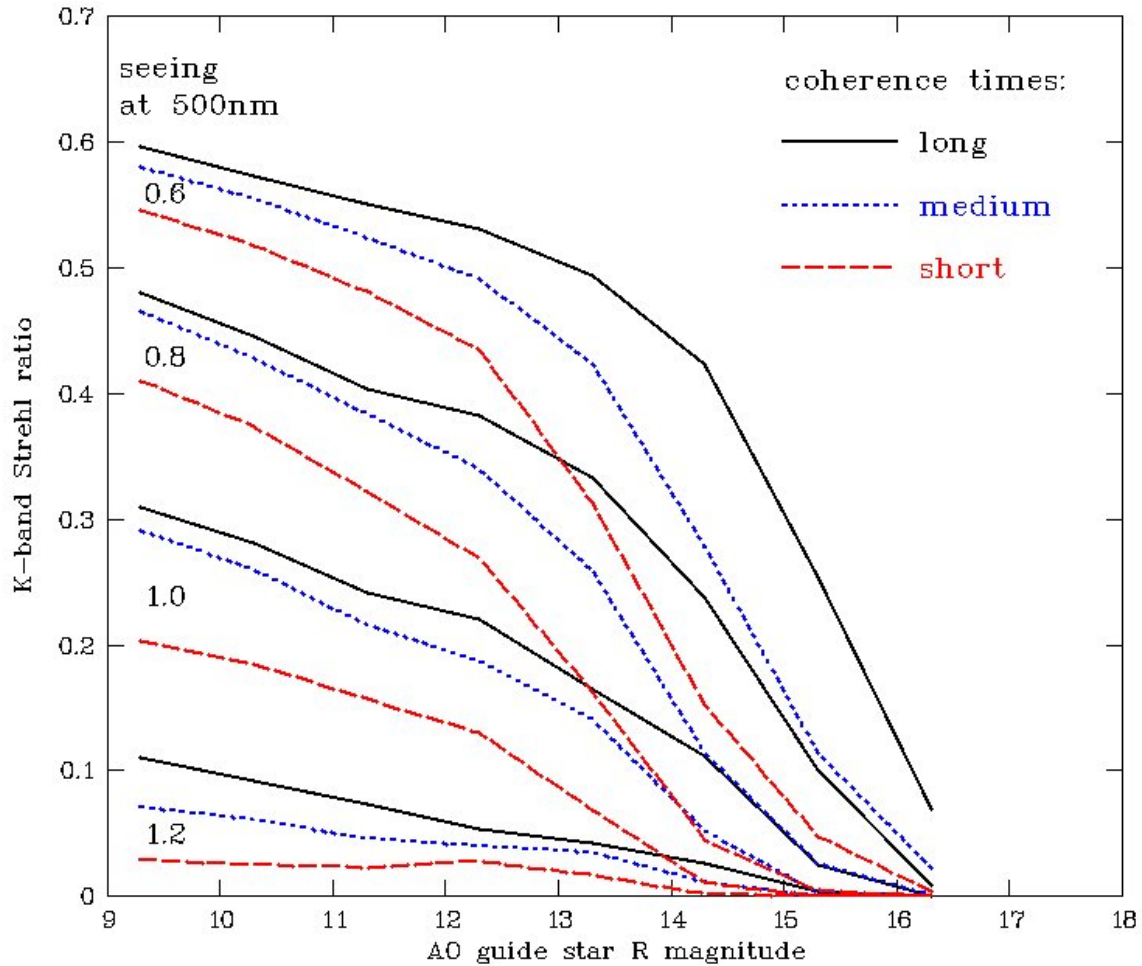


Figure 1: The predicted Strehl performance in K band is shown on the following figure for some seeing cases (0.6 to 1.2" at 500nm) and high altitude wind speeds of 11m/s (long), 22m/s (medium) and 33m/s (short):

The main uncertainty in the conversion between optical seeing and IR Strehl ratios is the undefined coherence time of the atmosphere. An example one would read from the figure that the Strehl ratio at seeing of 0.8" may vary between 0.16 and 0.33 for a 14th magnitude AO guide star for different coherence times!

An estimate of the high altitude wind speed for the coming week can be obtained from the Long term predictions for Paranal. In the figure above a high altitude wind speed of 33m/s was used to obtain the graph for the short coherence times.